

700 Snack 700



Characteristics



A Refrigeration unit

Sparblock plug-in - monobloc ventilated system

B Evaporator

Treated by cathoporesis, 316L stainless steel coil

C Controllore

Capacitive touch screen

D Door

Thickness 60mm, reversible right/left opening, self-closing 110° opening, removable double chamber magnetic gasket

E Insulation thickness

60mm - HFO polyurethane (no CFC, no HCFC)

F Internal finish

AISI 304 stainless steel

J Floor support

Stainless steel feet, galvanised external bottom panel



K Rounded corners/removable parts

For easy cleaning


O Worktop

AISI 304


Technical drawing and set-up

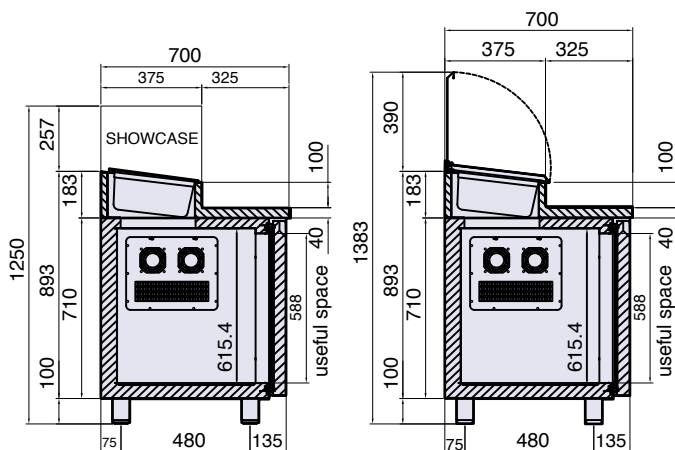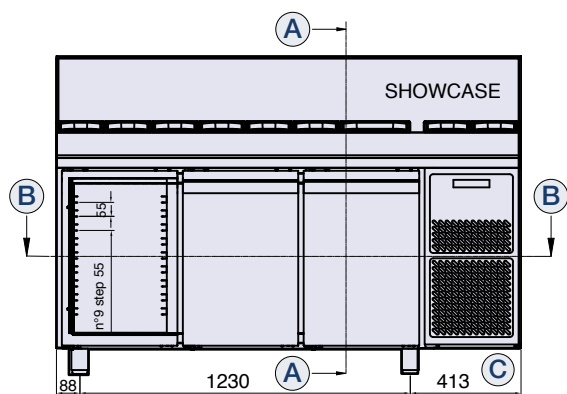

A-A

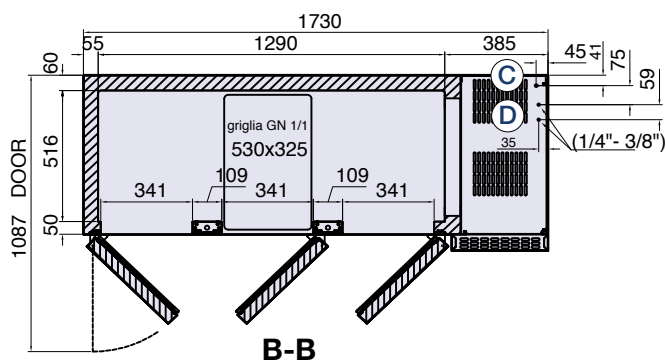

B-B

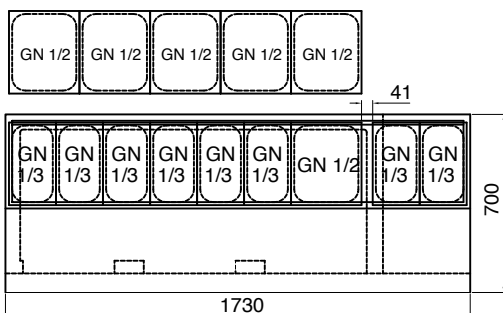

A Section plane


B Section plane

C Power cable outlet (length 2 m)





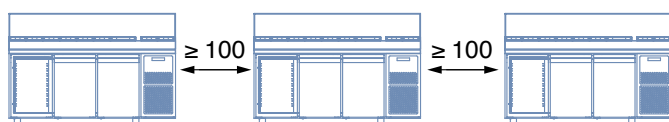


WARNING! While installing, have a qualified electrician connect it to an electrical panel.

D Gas pipes outlet

Prepared for remote motor



Technical specifications

Temperature (°C)	 +4/+10	 +4/+10	 +4/+10
Model	PPCS703XX	PPCS703ANXX	PPCS703MRXX
Doors			
Dimensions (mm) L x D x H	1730 x 700 x 1030-1080	1730 x 700 x 1030-1080	1730 x 700 x 1030-1080
Packaging (mm) L x D x H	1770 x 730 x 1120	1770 x 730 x 1120	1770 x 730 x 1120
Refrigerant	 R134a	 R290	 R134a
Absorption (W)	318	350	30
Voltage (V-Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)
Net weight (kg)	141	141	126
Gross weight (kg)	157	157	142
Tray-grids included (n.)	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325

Standard equipment

- # 1 plastic-coated grille with door guides

