

700 PLUS





Characteristics




- A Refrigeration unit**
Sparblock plug-in - monobloc ventilated system
- E Insulation thickness**
60mm - HFO polyurethane (no CFC, no HCFC)
- F Internal finish**
AISI 304 stainless steel
- J Floor support**
Stainless steel feet, galvanised external bottom panel
- K Rounded corners/removable parts**
For easy cleaning
- O Worktop**
AISI 304

- Q Interchangeable doors and drawers**

Technical drawing and set-up

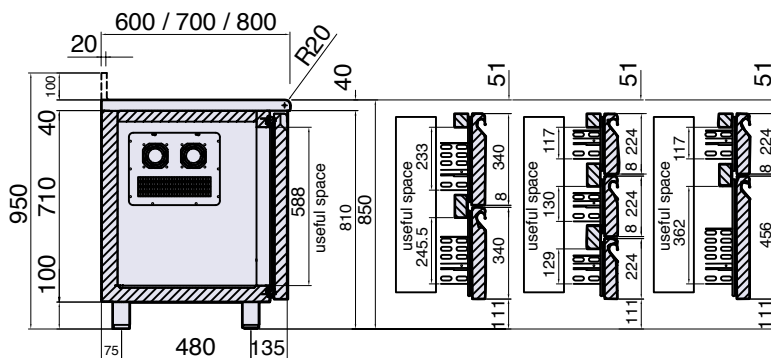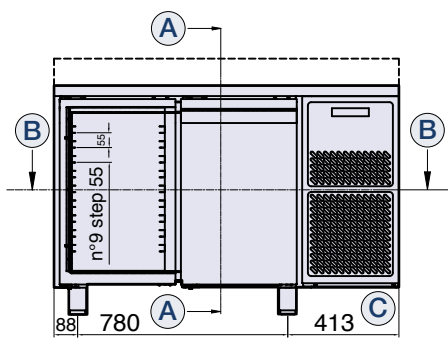


A-A

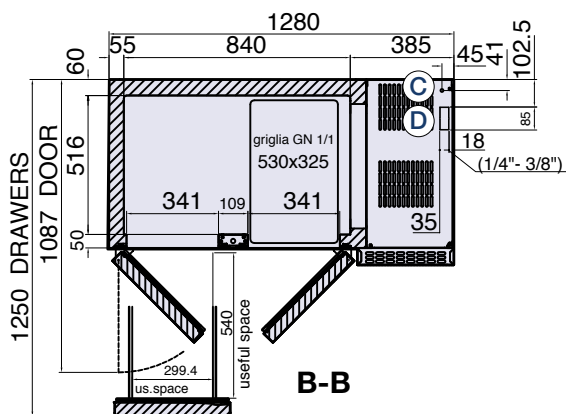





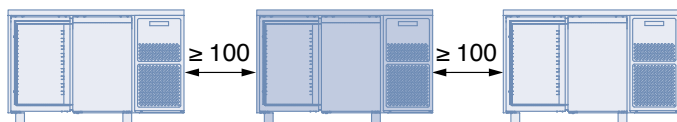







B-B

- A Section plane**
- B Section plane**
- C Power cable outlet (length 2 m)**
WARNING! While installing, have a qualified electrician connect it to an electrical panel.
- D Gas pipes outlet**
Prepared for remote motor



Technical specifications

Temperature (°C)	 0/+10	 0/+10	 -18/-22	 0/+10
Model	PPCT702XX	PPCT702ANXX	PPCT702DBXX	PPCT702MRXX
Doors				
Dimensions (mm) L x D x H	1280 x 700 x 850-900	1280 x 700 x 850-900	1280 x 700 x 850-900	1280 x 700 x 850-900
Packaging (mm) L x D x H	1320 x 730 x 1100	1320 x 730 x 1100	1320 x 730 x 1100	1320 x 730 x 1100
Refrigerant	 R134a	 R290	 R290	 R134a
Absorption (W)	318	350	740	30
Voltage (V-Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)
Net weight (kg)	93	93	96	79
Gross weight (kg)	106	106	109	92
Tray-grids included (n.)	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325

Standard equipment

- # 1 plastic-coated grille with door guides

