

700 Saladette 700




Characteristics



- A Refrigeration unit**
Sparblock plug-in - monobloc ventilated system
- B Evaporator**
Treated by cataphoresis, 316L stainless steel coil
- C Controllore**
Capacitive touch screen
- E Insulation thickness**
60mm - HFO polyurethane (no CFC, no HCFC)
- F Internal finish**
AISI 304 stainless steel
- J Floor support**
Stainless steel feet, galvanised external bottom panel

- K Rounded corners/removable parts**
For easy cleaning
- P Worktop**
AISI 304 front spoking

Technical drawing and set-up

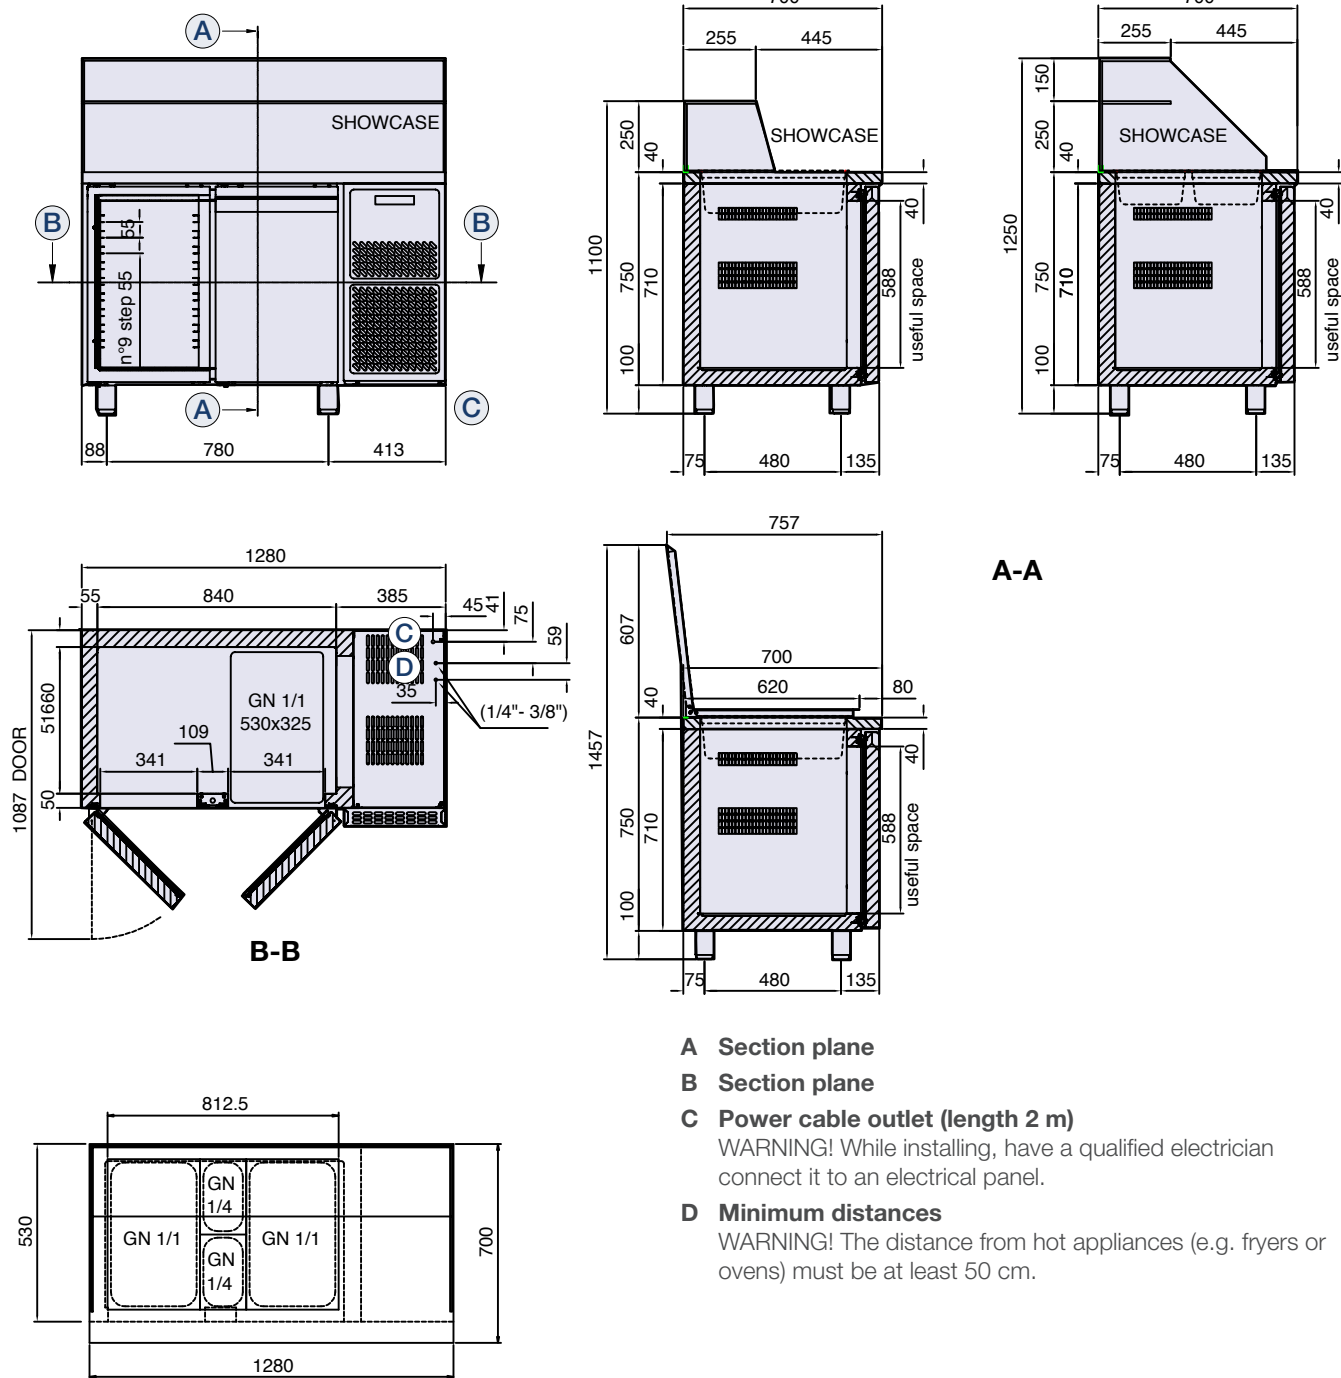

A Section plane


B Section plane

C Power cable outlet (length 2 m)







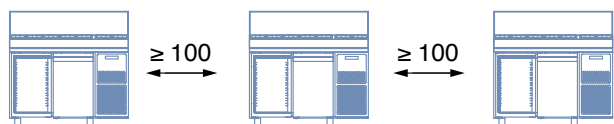

WARNING! While installing, have a qualified electrician connect it to an electrical panel.

D Minimum distances

WARNING! The distance from hot appliances (e.g. fryers or ovens) must be at least 50 cm.



Technical specifications

Temperature (°C)	 +4/+10	 +4/+10	 +4/+10
Model	PPSA702XX	PPSA702ANXX	PPSA702MRXX
Doors			
Dimensions (mm) L x D x H	1280 x 700 x 850-900	1280 x 700 x 850-900	1280 x 700 x 850-900
Packaging (mm) L x D x H	1320 x 730 x 1100	1320 x 730 x 1100	1320 x 730 x 1100
Refrigerant	 R134a	 R290	 R134a
Absorption (W)	318	350	30
Voltage (V-Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)
Net weight (kg)	106	106	92
Gross weight (kg)	119	119	105
Tray-grids included (n.)	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325

Standard equipment

- # 1 plastic-coated grille with door guides

