

# 700 Saladette 700




## Characteristics



- A Refrigeration unit**  
Sparblock plug-in - monobloc ventilated system
- B Evaporator**  
Treated by cataphoresis, 316L stainless steel coil
- C Controllore**  
Capacitive touch screen
- E Insulation thickness**  
60mm - HFO polyurethane (no CFC, no HCFC)
- F Internal finish**  
AISI 304 stainless steel
- J Floor support**  
Stainless steel feet, galvanised external bottom panel

- K Rounded corners/removable parts**  
For easy cleaning
- P Worktop**  
AISI 304 front spoking

# Technical drawing and set-up

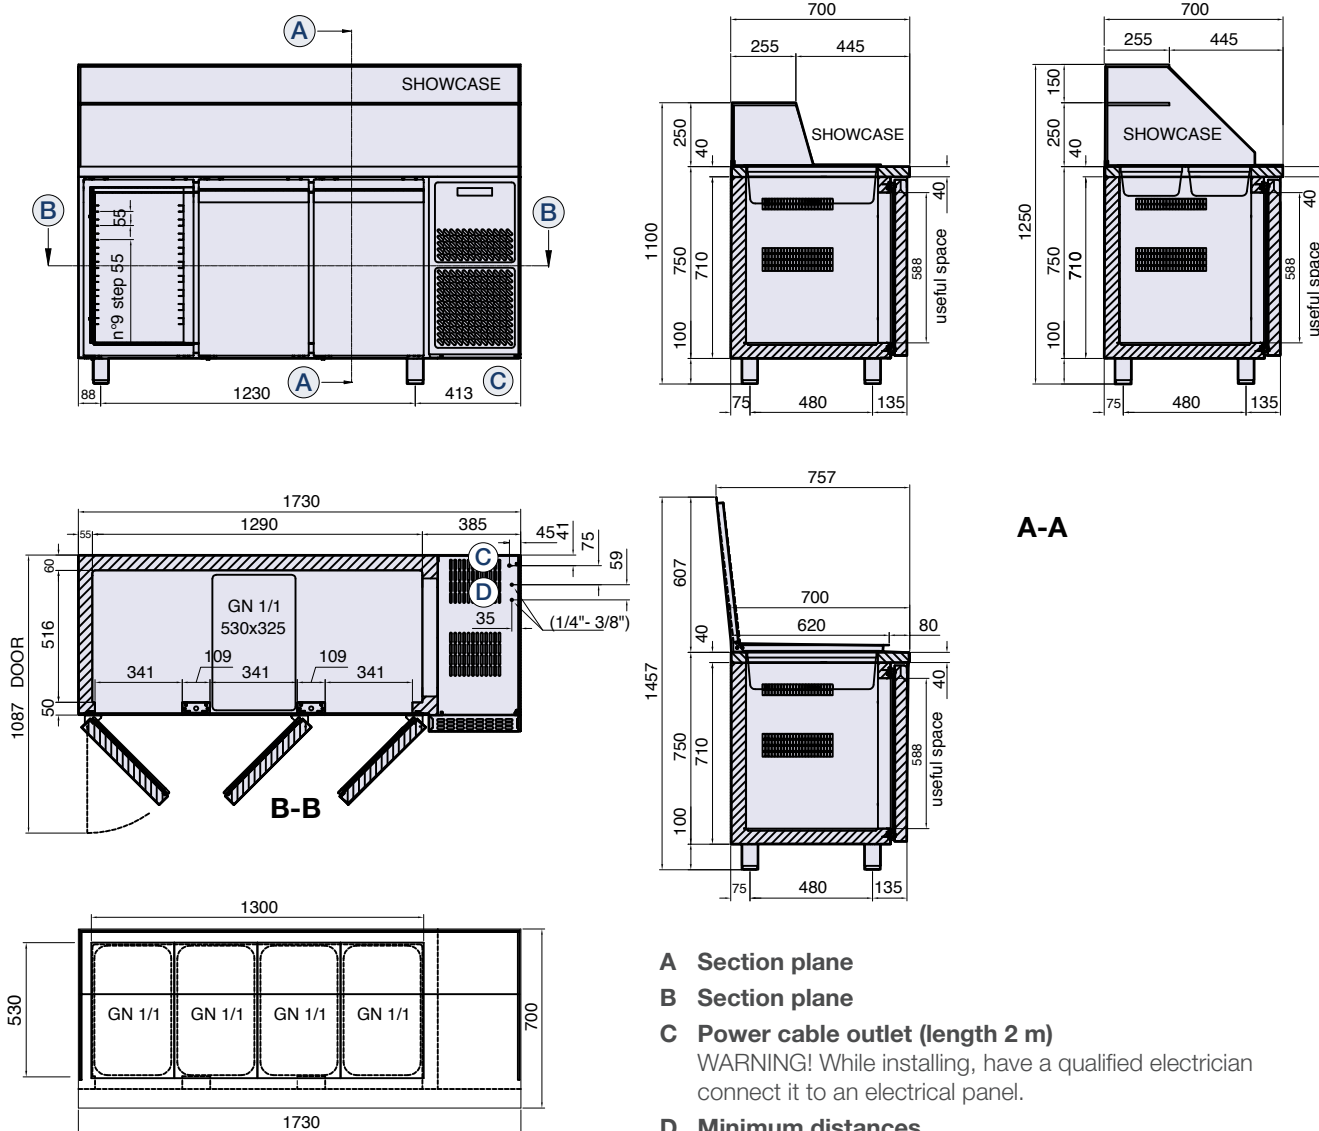

The values are expressed in mm, unless otherwise specified, and they are indicative and not binding.

## Technical specifications

<b>Temperature (°C)</b>	 +4/+10	 +4/+10	 +4/+10
<b>Model</b>	PPSA703XX	PPSA703ANXX	PPSA703MRXX
<b>Doors</b>			
<b>Dimensions (mm)</b> L x D x H	1730 x 700 x 850-900	1730 x 700 x 850-900	1730 x 700 x 850-900
<b>Packaging (mm)</b> L x D x H	1770 x 730 x 1100	1770 x 730 x 1100	1770 x 730 x 1100
<b>Refrigerant</b>	 R134a	 R290	 R134a
<b>Absorption (W)</b>	318	350	30
<b>Voltage (V-Hz)</b>	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)	AC 230V 1N+T (50Hz)/AC 230V 1N+T (60Hz)
<b>Net weight (kg)</b>	138	138	124
<b>Gross weight (kg)</b>	154	154	140
<b>Tray-grids included (n.)</b>	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325	1 grids x door GN 1/1 530x325

## Standard equipment

- # 1 plastic-coated grille with door guides

