

CUBE LINE C537T

TYPE	Undercounter warewasher
LINE	CUBE LINE
BASKET	500x500
SIZE	585x610x815h



ADVANCE



UP

Reliability and ease of use: these are the key words of the **CUBE** line. The **UP** control panel with buttons combines practicality and great durability. The simple and extremely efficient electronic card offers the possibility of setting and controlling the rinsing and draining times, the washing and rinsing temperatures and the relative Thermostops, crucial for ensuring excellent washing results. The **ADVANCE** panel (optional) is the real strength of the CUBE line thanks to its 4 washing cycles and one automatic drain cycle (with drain pump installed). On the control panel you can easily view the tank and boiler temperature, the messages of the Self-diagnosis system, the Scheduled Maintenance warning and the intelligent Start button, which changes colour to always display the dishwasher status very easily.

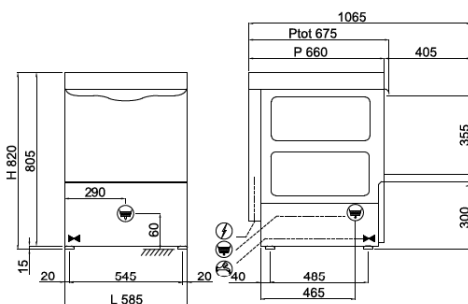

With the **C537T** dishwasher you can wash glasses of different shapes and sizes, as well as 18 dishes per wash with max Ø of 350mm thanks to the baskets provided, using a single 120-second standard cycle in the UP version, with a maximum productivity of 30 baskets/hour (540 dishes/hour).


The standard **double electric rinse-aid and detergent dispenser** ensures maximum hygiene at each wash cycle with great savings: the **moulded washing and rinsing arms** ensure reliability and durability. The bodywork is made entirely of **AISI 304 steel** and has been designed with all of the components in the front for **easy technical assistance**. Sturdy and reliable dishwashers to best deal with every moment of your day.


DISHWASHERS FEATURES	CUBE LINE C537T
Dimensions - (mm) L - P - H	585x610x815h
n° baskets/hour - (+55°C)	30
Height glass max	320mm
Ø height plate max	350mm
Trays	NO
Tank heating element - Tank capacity	2,6kW - 24lt
Boiler heating element - Boiler capacity	5,4kW - 7,3lt
Washing pump	0,52kW / 0,7Hp
Total power input / Current	5,92kW / 16A
Standard input voltage	400V3N+T 50Hz
Recommended inlet water temperature	+55°C
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt
Adjustable detergent and rinse-aid dispenser	ELECTRIC
STANDARD EQUIPMENT	
Cutlery insert	2
Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	1
OPTION	
UNIKO touch display with IKLOUD Wi-Fi control	-
Booster pump kit 0,5Hp	●
Drain pump kit 40W	●
Thermo/acoustic insulation double wall kit and upper cover	●
Stainless steel tank filter kit for rack dishwasher 500x500	●
Reverse osmosis system	-
Basket for trays with 4 compartments dim.500x500x200mm	●
Inclined basket for wine glasses dim.500x500x170mm	●
Kit 4 Stainless steel feet 50-70mm	●
ADVANCE display	●
ADVANCE display	●
ADVANCE display	●
ADVANCE display	●
ADVANCE display	●

● INSTALLABLE ACCESSORY , - NOT INSTALLABLE ACCESSORY

C537T



 400V3N+T 5,02kW
 L=1900 (6 POLES)


 G 3/4" M
 L=1200


 Ø25x30
 L=1500