

# MP 450 Ultra

D


Pan capacity

up to 100 litres



Easy Plug

▶ Specially designed for intensive use in commercial/institutional catering

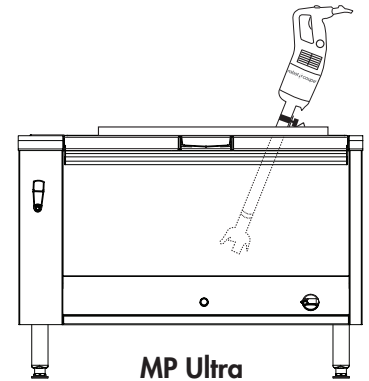

MP Ultra

A

### SALES DESCRIPTION

Ideal for blending soups and puréeing fruit and vegetables. Special institutional catering model intended for intensive use

B

### TECHNICAL DESCRIPTION

MP 450 Ultra stick blender. 230V/50Hz/1ph. Power: 500 W. Speed: 9,500 rpm. 100% stainless-steel blades, bell and tube (total length: 450 mm). "Easy Plug" system featuring detachable power cord

C

### TECHNICAL CHARACTERISTICS

Effective output	500 W
Electrical data	230V/50Hz/1ph 2.1 A – plug supplied
Speed	9,500 rpm
Recyclability	95%
Net weight	4.9 kg
Reference	34810

E

### CHARACTERISTICS AND BENEFITS

#### MOTOR UNIT

- Power 500 W
- Stainless-steel motor unit with air vents in the top section only to ensure watertightness
- Lug on motor housing serves as a rest and pivot on the pan rim for greater user comfort
- Speed 9,500 rpm
- Self-regulating speed system
- New patented "Easy Plug" system making it easier to replace the power cord during after-sales servicing
- Cord winding system for tidy storage and optimum lifespan

#### TUBE AND BELL

- 100% stainless-steel blades, bell and tube (total length: 450 mm).
- Foot with detachable bell and blades (patented system exclusive to Robot-Coupe)
- Watertight bell design for optimum lifespan

#### STANDARD ATTACHMENTS

- Wall-mounted stick blender holder
- Tool for fixing and detaching the blades

### STANDARDS

EN 12100-1 & 2-2004, EN 60204-1-2006, EN 12853, EN 60529-2000 : IP55 & IP34



## MP 450 Ultra

**F** OPTIONAL ATTACHMENTS

- 3 adjustable stainless-steel pan supports:
  - Ref. 27363 – for pans with a diameter of 330 650 mm
  - Ref. 27364 – for pans with a diameter of 500 1000 mm
  - Ref. 27365 – for pans with a diameter of 850 1300 mm
- 1 universal pan support:
  - Ref. 27354 – screws onto pan rim

**G** DRAWINGS & DIMENSIONS

230 V / 50 Hz / 1 ph – power cord and plug supplied

